

TRIBUILT® Safety Post


The TRI-BUILT® Safety Post is designed in compliance to OSHA to extend 42 inches above a landing platform to provide safe ladder access through a roof hatch. The spring assisted telescoping design mounts to the top two rungs of a fixed vertical ladder.

MATERIAL: 1-1/2 inch x 1-1/2 inch x 1/8 inch high strength square tubing with a pull up loop provided at the upper end to facilitate raising of post.

- Steel, yellow powder coat paint.
- Steel, hot dip galvanized
- Stainless Steel Type 304, mill finish
- Aluminum, Mill

BALANCING SPRING: Stainless steel constant force spring

HARDWARE: Type 316 stainless steel

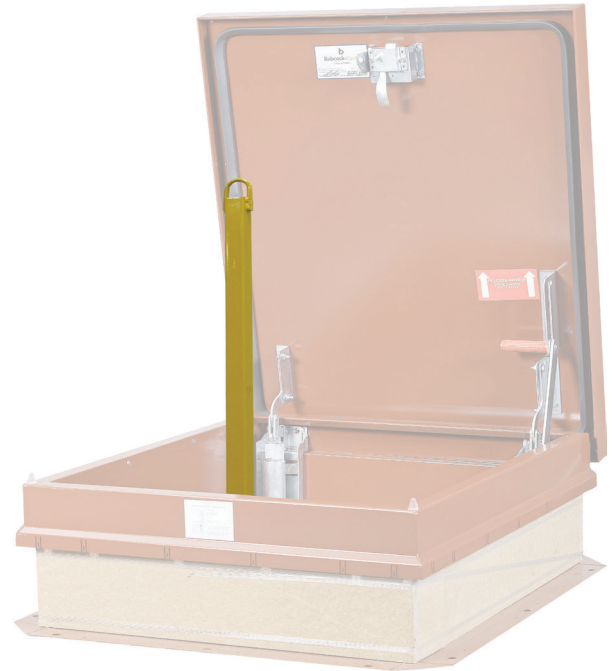

Model	Material	Finish
TBSPY	Steel	Yellow Powder Coat
TBSPG	Steel	Hot Dip Galvanized
TBSPA	Aluminum	Mill
TBSPS	Stainless Steel	Mill