

TRIBUILT
TRI-BUILT® MATERIALS GROUP, LLC
CUTTINGEDGEII
REPLACEMENT WINDOWS

DOUBLE HUNG WINDOWS



DOUBLE HUNG WINDOWS


Open up a world of opportunities with our double hung windows. They're easy to operate, easy to clean and provide customers with the energy efficiency and durability they want. Configurations include singles, stationary and combinations and a wide variety of architectural shapes.



DOUBLE HUNG



COLOR OPTIONS:

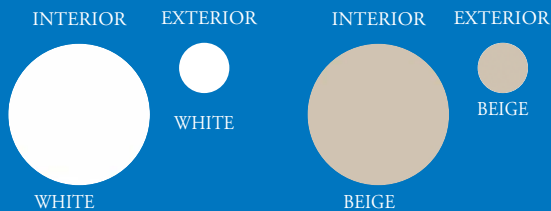

GRILLE OPTIONS:

GRILLES-BETWEEN-THE-GLASS (GBG)



5/8" Flat



5/8" Sculptured



5/8" Flat Perimeter

SIMULATED DIVIDED LITE (SDL)



7/8" Sculptured



TRI-BUILT® CUTTINGEDGE II REPLACEMENT WINDOWS HAVE BEEN GREEN APPROVED BY THE NAHB RESEARCH CENTER.

This means you can be assured that TRI-BUILT® CUTTINGEDGE II Replacement windows comply with specific green practice criteria in the National Green Building Standard. Visit www.GreenApprovedProducts.com for more details.

1. PG-X glass packages are triple pane insulated glass units with argon. See sidebar above for specific details.
2. Most double-hung windows meet a Design Pressure (DP) rating of 35.

* Colors are reproduced as accurately as printer technology allows. Please see your authorized TRI-BUILT® CUTTINGEDGE II representative for actual samples.

STANDARD FEATURES

- Sleek cam-action sash locks provide security and enhanced performance without compromising beauty
- 7/8" IGU glass systems offer energy-efficient InsulEdge standard spacer system
- 3 1/4" frame depth for traditional pocket window installation
- Designed with equal sight line sash for traditional wood window appearance
- Fusion-welded sash and frames stay strong and in place for a lifetime of dependable performance
- Both sash tilt in and are removable for easy and safe cleaning
- Integral interlock system provides protection against air infiltration and makes window more secure
- Double weatherstripped sash provides extra protection against dust, dirt and noise
- Integral lift handles makes opening windows easier
- Extruded aluminum half screen with fiberglass mesh standard
- Tested and approved to meet NFRC requirements, ENERGY STAR® units available
- Interior and exterior accessory groove allowing for a wide selection of installation options
- Two ventilation limit latches standard, child safety latches optional
- Hidden SilLock design with a sloped sill, eliminating the need for weep holes



OPTIONAL FEATURES

- **Glass package upgrades:** Insulated glass unit with one lite of Low-E or Low-E^{SC} (solar-cooling) glass and air fill; Performance Glass (PG) insulated glass unit with single lite of Low-E or Low-E^{SC} glass with argon gas; PG2-X triple pane unit/2 lites Low-E/argon; PG3-X triple pane unit with two lites of Low-E and one lite of interior surface Low-E glass/argon
- **Spacer system upgrade:** Low-conductive InsulEdge+ spacer system
- **Screen option materials:** Optimal viewing, solar block and aluminum mesh. Full screen optional on double hung windows
- **Additional glass options:** Advanced Easy Clean, tinted, double strength, obscure, glue chip obscure, tempered, laminated (security), or sound package (off-set glass)

