


TR-BUILT
TRI-BUILT® MATERIALS GROUP, LLC
CUTTINGEDGEII
REPLACEMENT WINDOWS

SLIDING WINDOWS

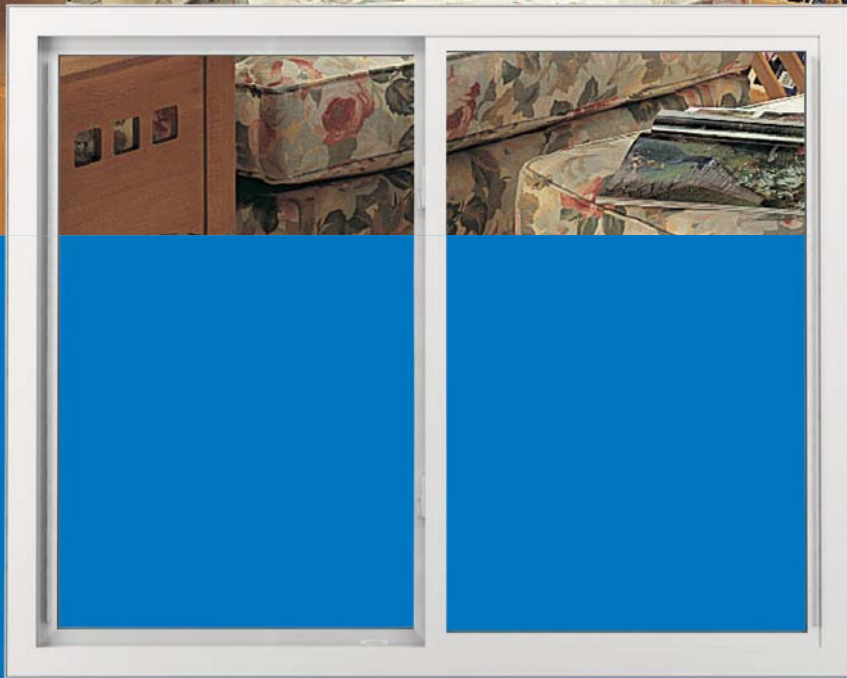

SLIDING WINDOWS


Our sliding windows are some pretty smooth operators. Designed with a track and roller system that makes opening and closing easy, these windows perform just as good as they look. Available in two different picture configurations ($\frac{1}{4}$ - $\frac{1}{2}$ - $\frac{1}{4}$ or $\frac{1}{3}$ - $\frac{1}{3}$ - $\frac{1}{3}$).



SLIDING WINDOW




COLOR OPTIONS:

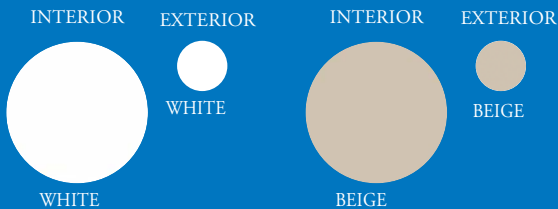

GRILLE OPTIONS:

GRILLES-BETWEEN-THE-GLASS (GBG)

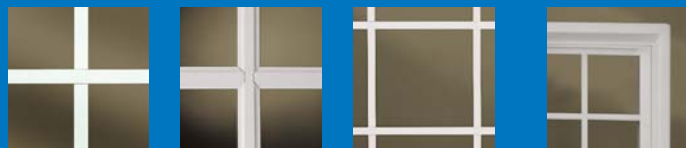

5/8" Flat

5/8" Sculptured

5/8" Flat Perimeter

7/8" Sculptured

SIMULATED DIVIDED LITE (SDL)



STANDARD FEATURES

- 3 1/4" frame depth for traditional pocket window installation
- 7/8" IGU glass systems offer energy-efficient InsulEdge standard spacer system
- Convenient lift-out sash for easy cleaning
- Track and adjustable roller system for ease of operation
- Sleek cam-action sash locks provide security and enhanced performance without compromising beauty
- Fusion-welded sash and frames stay strong and in place for a lifetime of dependable performance
- Double-opposed weatherstrip on sash ensures smooth operation
- Extruded aluminum half screen with fiberglass mesh
- Tested and approved to meet NFRC requirements, ENERGY STAR® units available
- One ventilation limit latch standard or child safety latch optional at bottom rail



OPTIONAL FEATURES

- **Glass package upgrades:** Insulated glass unit with one lite of Low-E or Low-E^{SC} (solar-cooling) glass and air fill; Performance Glass (PG) insulated glass unit with single lite of Low-E or Low-E^{SC} glass with argon gas; PG2-X triple pane unit/2 lites Low-E/argon; PG3-X triple pane unit with two lites of Low-E and one lite of interior surface Low-E glass/argon
- **Spacer system upgrade:** Low-conductive InsulEdge+ spacer system
- **Screen option materials:** Optimal viewing, solar block and aluminum mesh. Full screen optional on two-lite sliding windows
- **Additional glass options:** Advanced Easy Clean, tinted, double strength, obscure, glue chip obscure, tempered, laminated (security), or sound package (off-set glass)



TRI-BUILT® CUTTINGEDGE II REPLACEMENT WINDOWS HAVE BEEN GREEN APPROVED BY THE NAHB RESEARCH CENTER.

This means you can be assured that TRI-BUILT® CUTTINGEDGE II Replacement windows comply with specific green practice criteria in the National Green Building Standard. Visit www.GreenApprovedProducts.com for more details.

1. PG-X glass packages are triple pane insulated glass units with argon. See sidebar above for specific details.
2. Most sliding windows meet a Design Pressure (DP) rating of 25.

* Colors are reproduced as accurately as printer technology allows. Please see your authorized TRI-BUILT® CUTTINGEDGE II representative for actual samples.