



TRIBUILT
TRI-BUILT® MATERIALS GROUP, LLC
CUTTINGEDGEII
REPLACEMENT WINDOWS

CASEMENT & AWNING WINDOWS



CASEMENT & AWNING WINDOWS


Our casement and awning windows are a breath of fresh air. With a sash that opens 90°, your customers will enjoy great ventilation and will be able to clean them with ease. Plus, our awning windows can be combined, mullied and stacked with fixed casement picture windows. Configurations include singles, stationary and factory mullied twins and triples.



CASEMENT & AWNING



COLOR OPTIONS:

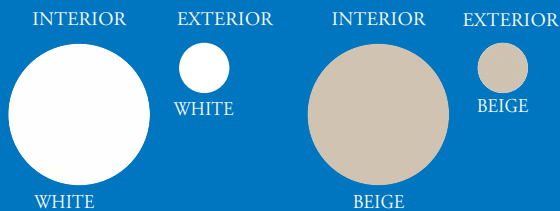

GRILLE OPTIONS:

GRILLES-BETWEEN-THE-GLASS (GBG)



5/8" Flat

5/8" Sculptured

5/8" Flat Perimeter

SIMULATED DIVIDED LITE (SDL)



7/8" Sculptured

STANDARD FEATURES

- 7/8" IGU glass systems offer energy-efficient InsulEdge standard spacer system
- 3 1/4" frame depth for traditional pocket window installation
- Interior and exterior accessory grooves providing a wide selection of installation options
- Available right or left hand operating
- Sash opens 90° for ventilation and easy cleaning
- Single handle multi-point locking system
- Fusion-welded sash and frames stay strong and in place for a lifetime of dependable performance
- Awning windows can be combined / mulled / stacked with fixed casement picture windows
- Adjustable hinges
- Full screen with fiberglass mesh
- Tested and approved to meet NFRC requirements, ENERGY STAR® units available



OPTIONAL FEATURES

- **Glass package upgrades:** Insulated glass unit with one lite of Low-E or Low-E^{SC} (solar-cooling) glass and air fill; Performance Glass (PG) insulated glass unit with single lite of Low-E or Low-E^{SC} glass with argon gas; PG2-X triple pane unit/2 lites Low-E/argon; PG3-X triple pane unit with two lites of Low-E and one lite of interior surface Low-E glass/argon
- **Spacer system upgrade:** Low-conductive InsulEdge+ spacer system
- **Screen option materials:** Optimal viewing; solar block and aluminum mesh
- **Additional glass options:** Advanced Easy Clean, tinted, double strength, obscure, glue chip obscure, tempered, laminated (security), or sound package (off-set glass)



TRI-BUILT® CUTTINGEDGE II REPLACEMENT WINDOWS HAVE BEEN GREEN APPROVED BY THE NAHB RESEARCH CENTER.

This means you can be assured that TRI-BUILT® CUTTINGEDGE II Replacement windows comply with specific green practice criteria in the National Green Building Standard. Visit www.GreenApprovedProducts.com for more details.

1. PG-X glass packages are triple pane insulated glass units with argon. See sidebar above for specific details.
2. Most awning and operating casement (casement gateway size of 24" by 60") windows meet a Design Pressure (DP) rating of 45 or 55 respectively.

* Colors are reproduced as accurately as printer technology allows. Please see your authorized TRI-BUILT® CUTTINGEDGE II representative for actual samples.