


## TRI-BUILT® 100NS Profile

### Residential Metal Roofing Systems

Our TRI-BUILT® 100NS profile offers unlimited design potential with its sleek, crisp appearance and attractive shadow lines. Eliminating the need for metal roof clips, the concealed 1" self-locking Snap Lock system creates a powerfully protective seal. Versatile and refined, this easy-to-install metal roof delivers superior beauty, durability and strength while showcasing architectural details.

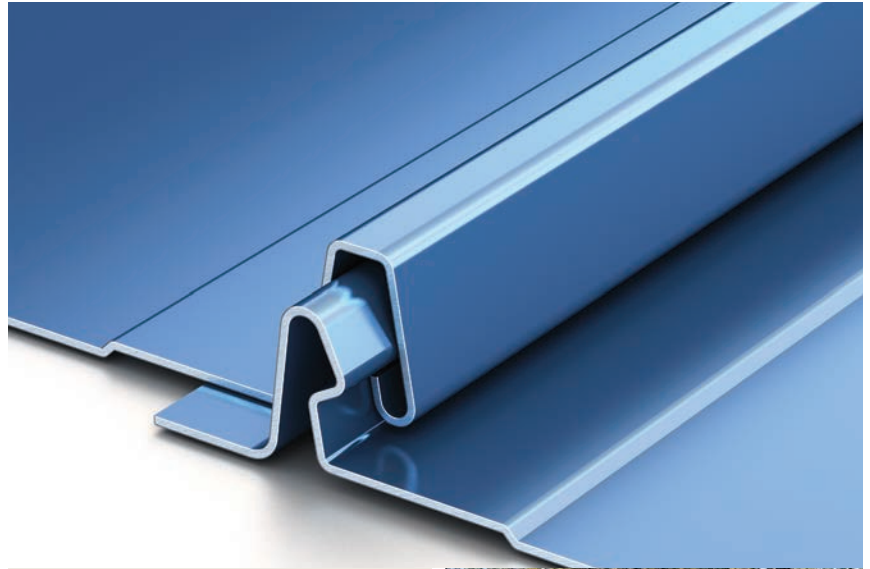

Ideal Application:

Residential




# DMC 100NS Profile

## Available widths:


16"\*

\*TRI-BUILT® Metals design pressures, wind uplifts and test reports are for specific deck attachments, material gauges, clip spacing and panel widths.



## Substrates available:

- Galvalume® – 24ga and 26ga
- Drexlumex® – 24ga and 26ga.
- Aluminum – .032"

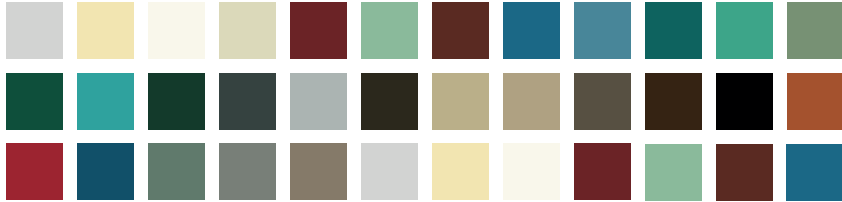

## Finishes and product warranty:

Available in a variety of coatings and colors by Valspar.



Galvalume® Substrate:  
High-performance painted metal roofing product, carefully tensioned leveled for superior flatness.

**35** YEAR WARRANTY

35-Year Non Pro-rated PVDF Paint Warranty

Aluminum Substrate:  
High-performance painted metal roofing product, carefully tensioned leveled for superior flatness.

**35** YEAR WARRANTY

35-Year Non Pro-rated PVDF Paint Warranty

Drexlumex® Substrate:  
Mill finished Galvalume® with a two-sided, clear acrylic finish.

**25** YEAR WARRANTY

25-Year Non Pro-rated TRI-BUILT™ Warranty (Acrylic Coated Galvalume)

## Production options:

Factory made or field rolled to exact lengths  
Optional: striation, beads, pencil ribs

## Installation:

Can be installed over plywood decking and TRI-BUILT® High Temperature Underlayments or Select TRI-BUILT® Synthetic Underlayments.



Select TRI-BUILT®  
Underlayments

## Slope:

Minimum slope 3:12



Minimum Roof Pitch:  
3:12 – low roof pitch

## Testing:

In accordance with:



- UL 580 Wind Uplift (Class 90)
- UL 2218 Class 4 Hail Impact
- UL 263 Fire Certification
- UL 790 Class A Fire Rating
- UL Environmental – SRI Third-Party Verified



All rights reserved. Galvalume® is a registered trademark of BEIC International, Inc. Drexlumex® is a trademark of Drexel Metals, Inc. ENERGY STAR name and logo are registered U.S. marks and are owned by the U.S. government. Colors shown represent the actual color as closely as possible. To ensure exact color for final approval, a metal color chip is available. Warranty statements mentioned are outlines: complete Limited Warranty information is available on request. No other warranty expressed or implied is applicable.